



20
25

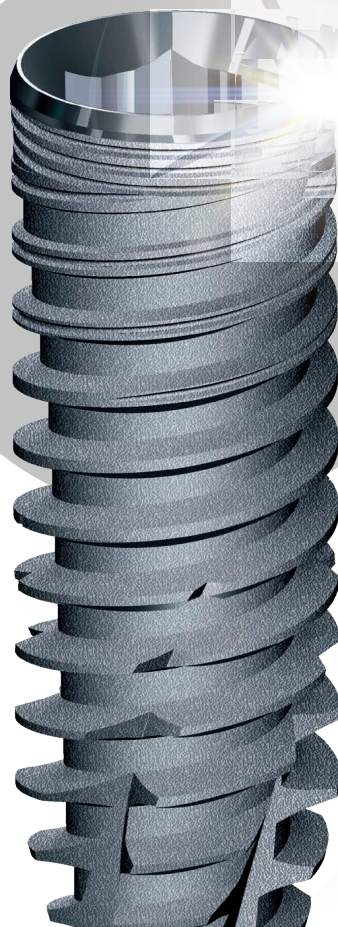

PRODUCTS
B R O C H U R E

PARALLEL IMPLANT

TECHNICAL CHARACTERISTICS

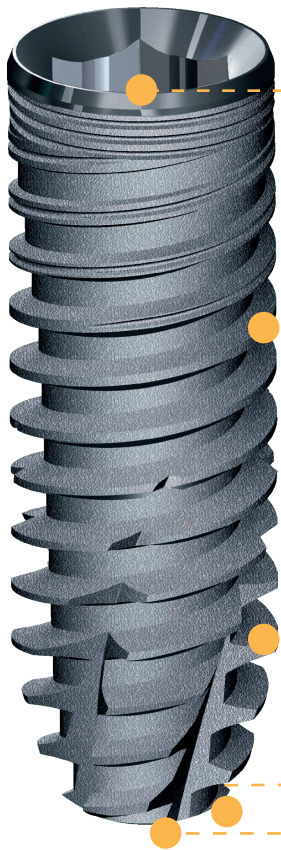

Adjustable Insertion Axis:

The implant allows for adjustment of the screwing axis to better accommodate clinical positioning.

Precision Micro-Grooves:

Fine grooves are integrated into the implant surface to help minimize long-term bone loss.

Effective Apical Drills:


The apical portion includes helicoidal shaping to support smooth and stable advancement into the bone.

Enhanced Insertion Efficiency:

The implant features a spiral design with a hybrid thread pattern—externally flat and triangular toward the apex—which improves insertion capability, even in sites that haven't been fully prepared.

PARALLEL IMPLANT

| 3.25 |



| 2.2 |


3.25 SIZES

REF CODE	1012.001	1012.002	1012.003	1012.004
				
HIGHT	10	11.5	13	16
Ø	3.25	3.25	3.25	3.25

PARALLEL IMPLANT

PROSTHETIC COMPONENTS

HEALING ABUTMENT



REF CODE



HIGHT

1032.001



2

1032.002



4

1032.003



6

COMPONENTS FOR IMPRESSIONS AND MODELS

PICK UP
IMPRESSION COPY



*VTPR3200

Ø

3.8

REF

TPR3200

TRANSFER
IMPRESSION COPY



*VTST32

REF

TST325

IMPLANT
ANALOGUES



REF

1022.001

PARALLEL IMPLANT

COMPONENTS FOR CEMENTED PROSTHETICS

STRAIGHT ABUTMENT



REF CODE

HIGHT Ø

1042.015

1.5 3.8

1042.016

3 3.8

1042.023

Z



REF VFD032
Fastening screw included and available as a replacement

CASTABLE ABUTMENT
20Ncm Torque adapter
REF TW0001

REF ML

CASTABLE ABUTMENT

1042.021 ZE

CASTABLE ABUTMENT

1042.022 ZR

PARALLEL IMPLANT

COMPONENTS FOR CEMENTED PROSTHETICS

ANGLED ABUTMENT

20Ncm Torque adapter REF TW0001

15°/25°



| Ø |

H

REF ANGLE/ML



HIGHT

Ø

1042.017 15°/325



1.5

3.8

1042.018 15°/325



3

3.8

1042.019 25°/325



1.5

3.8

1042.020 25°/325



3

3.8

COMPONENTS FOR PROSTHETICS SCREWED AT THE IMPLANT LEVEL

CYLINDERS

20Ncm Torque adapter REF TW0001



REF VFD032
Fastening screw included and
available as a replacement

CYLINDER



REF

ML

TEMPORARY
CYLINDER



PKE320

325E ●

TEMPORARY
CYLINDER



PKR032

325R ●

CYLINDER
ABUTMENT



PPE325

325E ●

CYLINDER
ABUTMENT



PCR032

325R ●

PARALLEL IMPLANT

COMPONENTS FOR PROSTHETICS SCREWED TO AN ABUTMENT

MUA ABUTMENTS

20Ncm Torque adapter REF TW0080
Supplied with transfer handle



MUA ABUTMENT



REF

HIGHT

MUA ABUTMENT



1072.001

1

MUA ABUTMENT



1072.002

2.5

ANGLED ABUTMENT
17° MUA



1072.003

1.5

ANGLED ABUTMENT
17° MUA



1072.004

3

ANGLED ABUTMENT
30° MUA



1072.005

1.5

ANGLED ABUTMENT
30° MUA



1072.006

3

PARALLEL IMPLANT

CYLINDER



REF

1072.011

CYLINDER



REF

1072.010

IMPRESSION
TRANSFER



REF

1072.014

ABUTMENT
ANALOGUE



REF

1072.007

PROTECTIVE CAP



REF

1072.012

MUA
BONDING BASE



REF

1072.009

MUA
SCAN ABUTMENT



REF

1072.013

MUA
DIGITAL ANALOGUE



REF

1072.008

PARALLEL IMPLANT

COMPONENTS FOR PROSTHETICS SCREWED TO AN ABUTMENT

SCAN ABUTMENT



*05.085

REF

SCAN325

Digital CAD-CAM Intraoral Scan and Laboratory Scan. For single cemented and screwed elements. For multiple cemented elements.

DIGITAL ANALOGUE



ML
REF

ZM
AG3212DG

Analogue for digital models, specific for applications through the manufacture of models made with 3D printing/prototyping. The characteristic shape with rounded edges, allows easy insertion into the model seat, without interference and friction with the resinous material of the models. The apical screw allows to always obtain a total working stability. This prosthetic component must be used through the Libraries.


REF	Description			Closing screw	Screwdriver
1042.005	TI BASE SIRONA DYNAMIC ENGAGING	NP	h.0.5	350031	200/O11 200012
1042.001	TI BASE SIRONA DYNAMIC ENGAGING	NP	h.1	350032	200/O11 200012
1042.003	TI BASE SIRONA DYNAMIC ENGAGING	NP	h.2	350033	200/O11 200012
1042.006	TI BASE SIRONA DYNAMIC NON ENGAGING	NP	h.0.5	350031	200/O11 200012
1042.002	TI BASE SIRONA DYNAMIC NON ENGAGING	NP	h.1	350032	200/O11 200012
1042.004	TI BASE SIRONA DYNAMIC NON ENGAGING	NP	h.2	350033	200/O11 200012

PARALLEL IMPLANT


OVERDENTURE COMPONENTS – BALL ATTACHMENT

BALL ABUTMENT

20Ncm Torque adapter REF RDS225


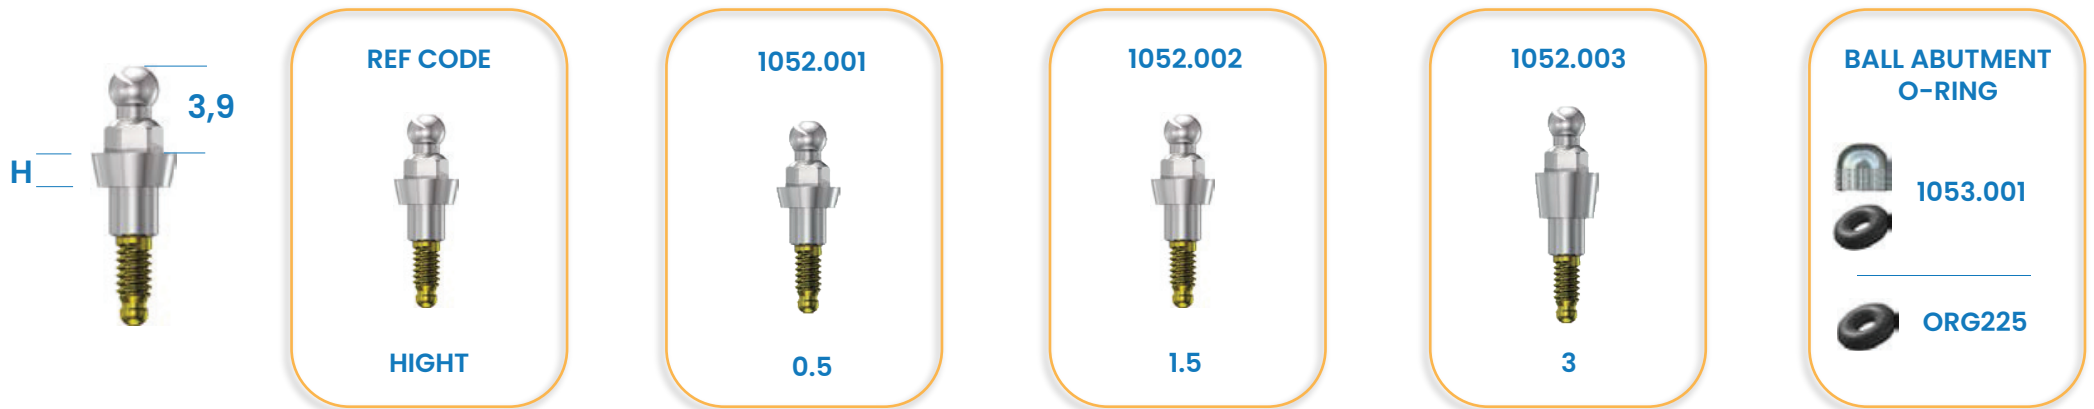


OVERDENTURE ABUTMENT

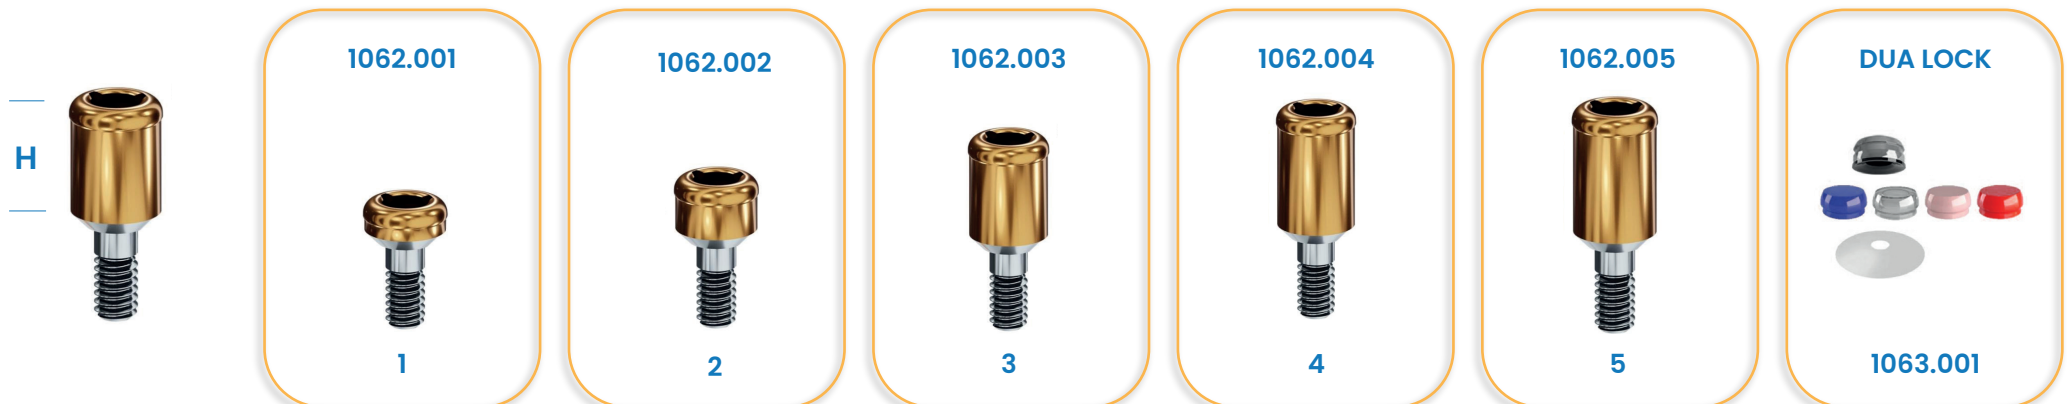



PARALLEL IMPLANT

REGULAR SIZES

3.75   2.7						
	REF CODE	1010.001	1010.002	1010.003	1010.004	1010.005
						
	HIGHT Ø	8 3.75	10 3.75	11.5 3.75	13 3.75	16 3.75
4.25   3.05						
		1010.006	1010.007	1010.008	1010.009	1010.010
						
		6 4.25	8 4.25	10 4.25	11.5 4.25	13 4.25


PARALLEL IMPLANT

REGULAR SIZES

4.75   3.55						
	REF CODE	1010.011	1010.0012	1010.013	1010.014	1010.015
						
	HIGHT Ø	6 4.75	8 4.75	10 4.75	11.5 4.75	13 4.75
5.5   4.75						
		1010.016	1010.017	1010.018	1010.019	1010.020
						
		6 4.25	8 4.25	10 4.25	11.5 4.25	13 4.25

ACTIVE IMPLANT

TECHNICAL CHARACTERISTICS

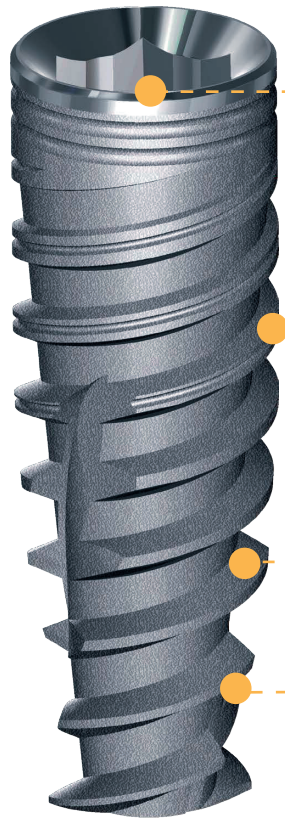

Flexible Positioning Options:

Provides the ability to adjust insertion direction, supporting ideal prosthetic alignment—particularly valuable in post-extraction scenarios.

Unique Spiral Configuration:

The distinct spiral structure of the implant facilitates procedures such as ridge expansion, enhancing surgical efficiency.

Long-Term Bone Support:

Optimized to reduce the need for extensive bone remodeling over time, helping preserve bone volume and minimizing surgical trauma.

Lower Risk of Complications:

Designed to minimize the possibility of damaging adjacent teeth or perforating the buccal and/or lingual cortical plates.

ACTIVE IMPLANT

REGULAR SIZES

3.75  2.9						
4.25  3.0						
REF CODE		1011.001	1011.002	1011.003	1011.004	1011.005
						
HIGHT Ø		8 3.75	10 3.75	11.5 3.75	13 3.75	16 3.75
		1011.006	1011.007	1011.008	1011.009	1011.010
						
		8 4.25	10 4.25	11.5 4.25	13 4.25	16 4.25

ACTIVE IMPLANT

REGULAR SIZES



REF CODE	1011.011	1011.012	1011.013	1011.014
				
HIGHT Ø	8 4.75	10 4.75	11.5 4.75	13 4.75

ACTIVE & PARALLEL REGULAR SIZES

PROSTHETIC COMPONENTS

HEALING ABUTMENT



ABUTMENT REF CODE HIGHT	HEALING ABUTMENT PARALLEL 019514 2	HEALING ABUTMENT PARALLEL 019538 6	HEALING ABUTMENT TAPER 1031.001 2	HEALING ABUTMENT TAPER 1031.002 4	HEALING ABUTMENT TAPER 1031.003 6
HEALING ABUTMENT TAPER LARGE 1031.004 2	HEALING ABUTMENT TAPER LARGE 1031.005 4	HEALING ABUTMENT TAPER LARGE 1031.006 6	HEALING ABUTMENT TAPER EXTRA LARGE 1031.007 2	HEALING ABUTMENT TAPER EXTRA LARGE 1031.008 4	HEALING ABUTMENT TAPER EXTRA LARGE 1031.009 6

ACTIVE & PARALLEL REGULAR SIZES

PROSTHETIC COMPONENTS

COMPONENTS FOR IMPRESSIONS AND MODELS

PICK UP IMPRESSION COPY		PICK UP IMPRESSION COPY		PICK UP IMPRESSION COPY		TRANSFER IMPRESSION COPING		TRANSFER IMPRESSION COPING		IMPLANT ANALOG	
	*05.010/VF		*05.010/VF		*05.010/VF		*020237/VF		*020237/VF		
Ø ML REF	3.5 Z 1081.005	Ø ML REF	4.5 Z 1081.001	Ø ML REF	6.5 ZL 1081.002	ML REF	Z 1081.004	ML REF	Z 1081.003	ML REF	Z 1021.001

COMPONENTS FOR CEMENTED PROSTHETICS

STRAIGHT ABUTMENT

20Ncm Torque adapter REF TW0001



REF 020022

Fastening screw included and available as a replacement

STRAIGHT ABUTMENT	
	
Ø ML REF	3.75 Z 1081.002

ACTIVE & PARALLEL REGULAR SIZES

COMPONENTS FOR CEMENTED PROSTHETICS

PICK UP IMPRESSION COPY

Fastening screw included

PICK UP IMPRESSION COPY		PICK UP IMPRESSION COPY		PICK UP IMPRESSION COPY		TRANSFER IMPRESSION COPING		TRANSFER IMPRESSION COPING		IMPLANT ANALOG	
											
Ø	3.5	Ø	4.5	Ø	6.5						
ML	Z	ML	Z	ML	ZL	ML	Z	ML	Z	ML	Z
REF	1081.005	REF	1081.001	REF	1081.002	REF	1081.004	REF	1081.003	REF	1021.001

STRAIGHT ABUTMENT

20Ncm Torque adapter REF TW0001

REF 1041.018		REF 1041.014		REF 1041.015		REF 1041.016		REF 1041.017		REF 1041.029	
											
Ø	3.75	Ø	4.5	Ø	4.5	Ø	5.5	Ø	5.5	Ø	5.5
ML	Z	ML	Z	ML	Z	ML	ZL	ML	ZL	ML	ZL



REF 020022

Fastening screw included and available as a replacement

ACTIVE & PARALLEL REGULAR SIZES

COMPONENTS FOR CEMENTED PROSTHETICS


CASTABLE ABUTMENT

20Ncm Torque adapter REF TW0001



ANGLED ABUTMENT

20Ncm Torque adapter REF TW0001

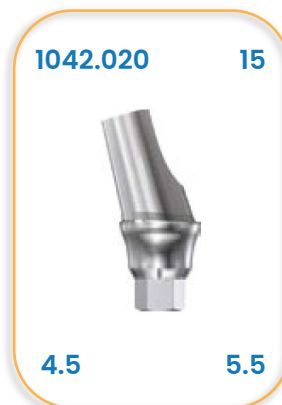

ACTIVE & PARALLEL REGULAR SIZES

COMPONENTS FOR CEMENTED PROSTHETICS

ANGLED ABUTMENT


20Ncm Torque adapter REF TW0001



COMPONENTS FOR PROSTHETICS SCREWED AT THE IMPLANT LEVEL

CYLINDERS

20Ncm Torque adapter REF TW0001

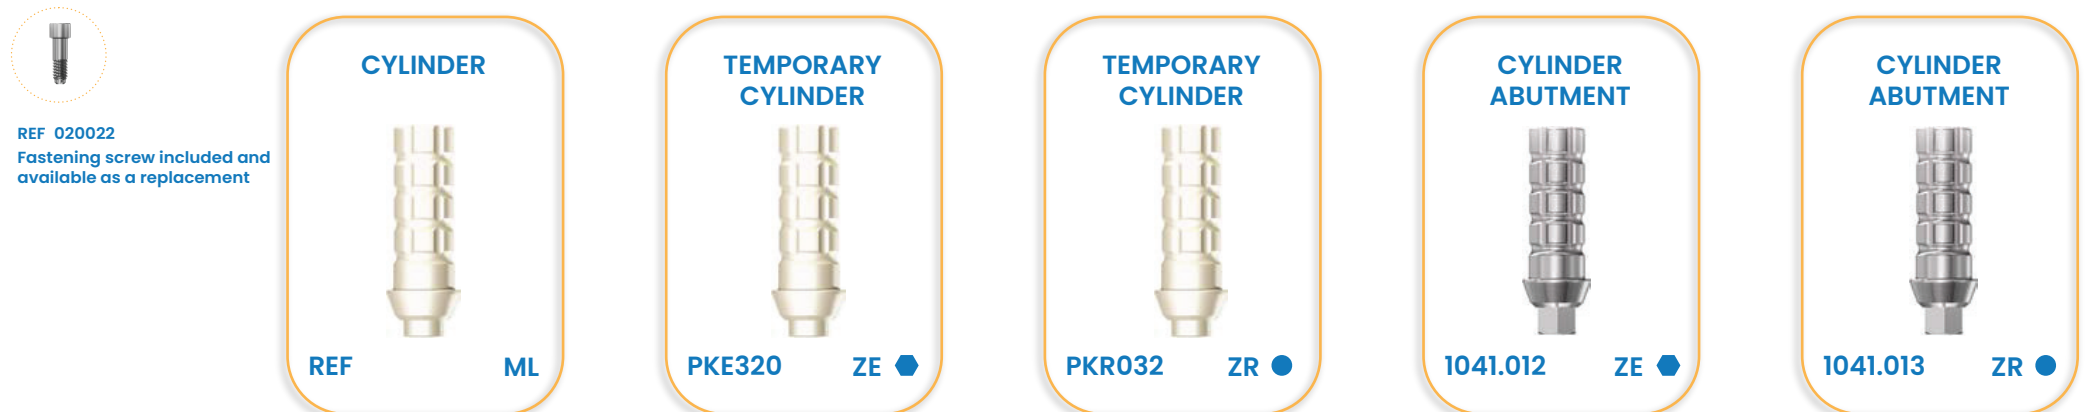

ACTIVE & PARALLEL REGULAR SIZES

COMPONENTS FOR PROSTHETICS SCREWED TO AN ABUTMENT

MUA STRAIGHT ABUTMENT

20Ncm Torque adapter REF TW0080
Supplied with transfer handle



MUA ABUTMENT



REF

HIGHT

1071.001



1


1071.002



3

MUA ANGLED ABUTMENT

20Ncm Torque adapter REF TW0080
Supplied with transfer handle



REF CODE



HIGHT

ML

REF CODE



1

ZL17

REF CODE



1

ZL17

REF CODE



1

ZL30

REF CODE



1

ZL30

ACTIVE & PARALLEL REGULAR SIZES

COMPONENTS FOR PROSTHETICS SCREWED TO AN ABUTMENT

PROTECTION CAP MUA

Pack. 2 pcs
Use only on MUA abutments



ML
REF

ZM
1071.009

MUA CYLINDER

Pack. 2 pcs
Use only on MUA
abutments Lock manually



ML
REF

ZM
1071.008

MUA CYLINDER

Pack. 2 pcs
Use only on MUA
abutments Lock manually



ML
REF

ZM
1071.010

MUA PROSTHETIC SCREW

Pack. 2 pcs
Use only on MUA
abutments Lock manually



ML
REF

ZM
020602

MUA PROSTHETIC SCREW

Pack. 2 pcs
Use only on MUA
abutments Lock manually



ML
REF

ZM
020527

MUA PRECISION TRANSFER



*05.084

ML
REF

ZM
1071.011

MUA ABUTMENT ANALOGUE



ML
REF

ZM
1071.007

MUA SCAN ABUTMENT



REF

1071.014